

## DESCRIPTION

This series of compact, open PCB constructed, AC-DC switching power supplies are capable of delivering 37.5-64 watts of continuous output power at convection cooling. They operate at 90-264 VAC input voltage without the need of voltage fan, and are suited for medical, information technology and industrial applications. Approval to both EN60601-1 and EN60950-1 safety standards improves design-in time and reduces end equipment compliance costs.

## FEATURES

- Medical and ITE approvals
- Compact size 2" x 4" x 1.18"
- Single, dual and triple outputs
- Wide-range input 90-264 VAC
- Low earth leakage current
- Level B emissions
- RoHS compliant

## WATTAGE

Wattage: 60W

## DIMENSION

Dimension: 101.6mm(L) x 50.8mm(W) x 30.0mm(H)

## INPUT SPECIFICATION

Input Range: 90-264 Vdc  
 Input Frequency: 47-63 Hz  
 Input Current: 1.3A(rms) for 100VAC, 0.7A(rms) for 240VAC  
 Leakage Current: 150  $\mu$ A max. @ 264 VAC, 63 Hz

## FSP060MWVS0120



60W/12V

## SAFETY STANDARD APPROVAL



## OUTPUT SPECIFICATION

**Ripple & Noise:** Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500  $\mu$ s after a 25% step load change  
**Over Current Protection:** All outputs protected to short circuit conditions.

## GENERAL SPECIFICATION

**Efficiency:** 80~88% typical except PM42-31-3A and PM42-31-5A at 75% typical  
**Inrush Current:** 30A @ 115VAC, or 60A @ 230VAC, at 25°C cold start

## ENVIRONMENTAL SPECIFICATION

**TEMP. Range:** Operating Temperature: -10°C to +70°C  
 Storage Temperature: -40°C to +85°C  
**MTBF:** 400,000 hours at full load at 25°C ambient, calculated per MIL-HDBK-217F


## \*Output Voltage and Current Rating

	+12V1
Ripple-Noise(R-P) mV	120mV
Regulation Load %	±2%
Output Max.(A)	5A
Output Min.(A)	0A

## NOTES

- Safety approvals are for PCB form only. To order unit with cover fitted, change suffix "0" to "U".
- Maximum current of output # 1 of multi-output models can be 8 A at 5 CFM forced air provided by user.
- It is rated at 37.5 W maximum at convection cooling or 47.5 W maximum at 5 CFM forced air cooling by user.
- The output voltages of a multiple output model may go outside of the stated tolerance when an output load current is out of stated limits. All models may be operated at no-load without damage.
- Ripple and noise is maximum peak to peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 $\mu$ F tantalum capacitor in parallel with a 0.1 $\mu$ F ceramic capacitor across the output.

## MECHANICAL SPECIFICATION

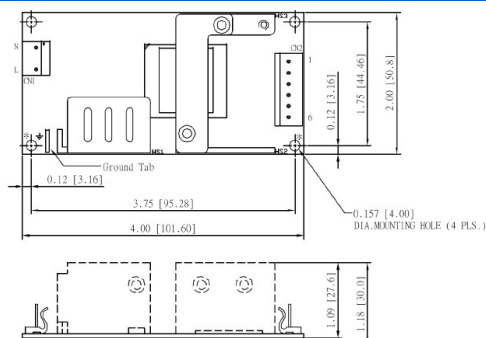

This content is subject to change, please refer to specification for more detail.  
 FSP reserve the right to change the content without prior notice