


CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES



1.Mechanical Dimensions

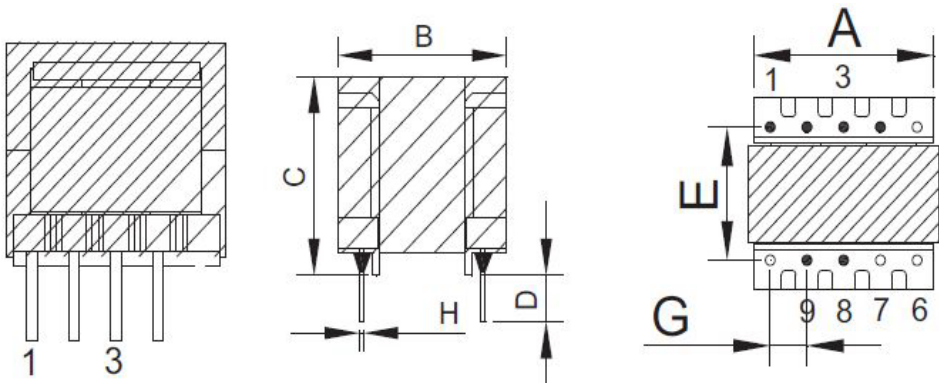


A	14.5	MAX
B	14.0	MAX
C	15.0	MAX
D	3.5	±0.5
E	8.5	±0.4
G	2.5	±0.3
H	0.60	±0.1

3.Material List


Core:FW44 EE13/12/6
 Bobbin:FWB1302(5+5PIN)
 Wire:2UEW TIW
 Operating Temperature: -30 to115 ℃

2.Schematic Diagram

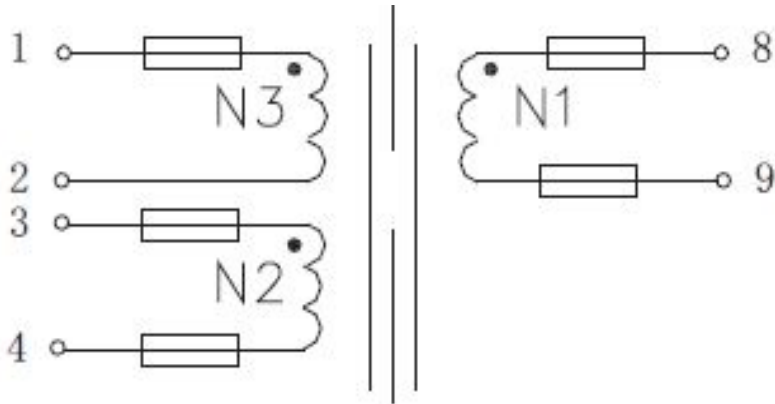

4.Electrical Specification

Inductance:L(8-9):3mH min100KHZ 、 0.6V
 DCR : (8-9)=1.07Ω MAX
 Hi-Pot:P-S: AC 60Hz 3000V 1mA 3S
 P-CORE:AC 60Hz 1200V 1mA 3S

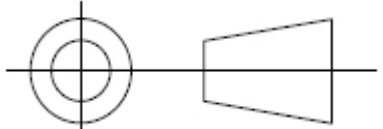REV.	DATE	 Convention Placement	DRW.		Drawing Title:	Part No:
0	00/00		CHK.			
			APP.		Customer P/N	Specification Sheet 1of 1
ROHS		www.fosopower.com			TRANSFORMER	FWPTEE13V302N