



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES



1.Mechanical Dimensions

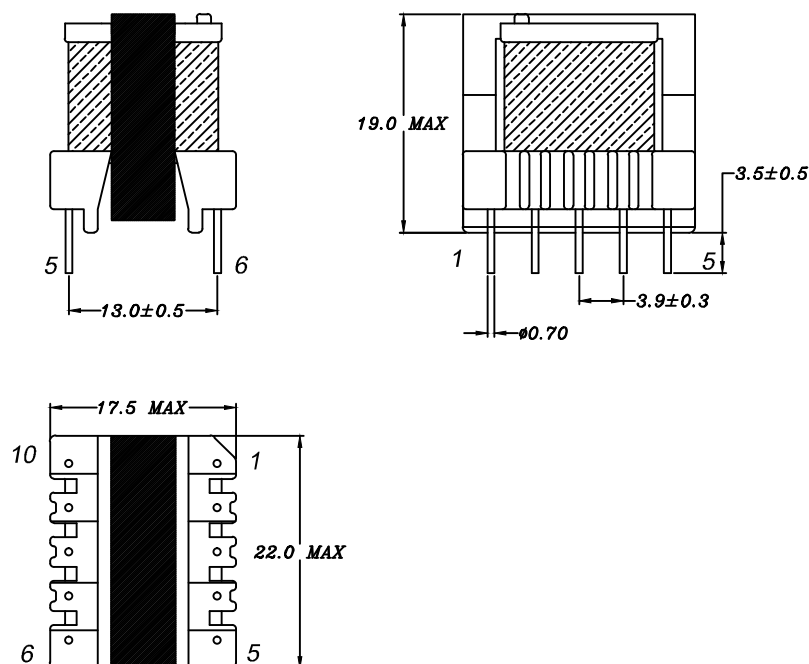

2.Schematic Diagram

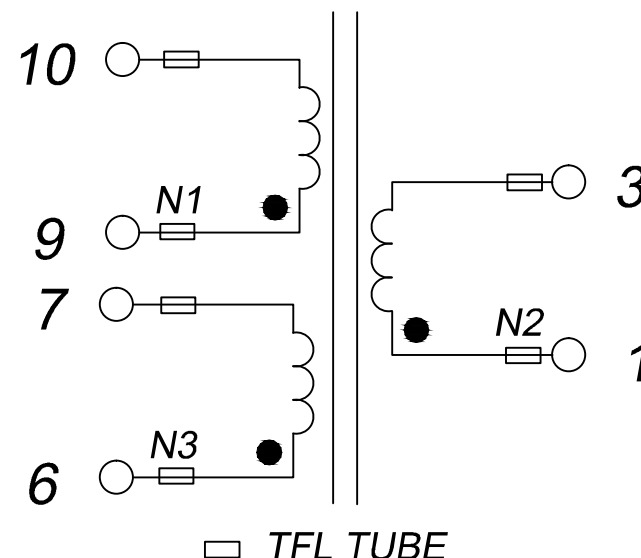

3.Material List

Core:FW40-EE19

Bobbin:FWB1909 (5+5pin)

Wire:1UEW TEX-B

Tube:TFL TUBE AWG#28、32

Operating Temperature: -30 to 115℃

4.Electrical Specification

Inductance: $L(9-10)=2.2\text{mH}\pm 10\%$ 10KHZ 0.1V

DCR: (1-3)=60mΩ MAX (6-7)=1.0Ω MAX

(9-10)=3.0Ω MAX

HI-POT: P-S AC 3600V 5mA 1S N1-N3 AC 1500V 5mA 1S

P、S-CORE AC 500V 5mA 1S

REV.	DATE		DRW.		Drawing Title:	Part No:
0	00/00		CHK.		TRANSFORMER	FWPT EE19V 222K
		Convention Placement	APP.		Customer P/N:	Specification Sheet 1 of 1
RoHS		www.fosopower.com				