



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES



1. Mechanical Dimensions

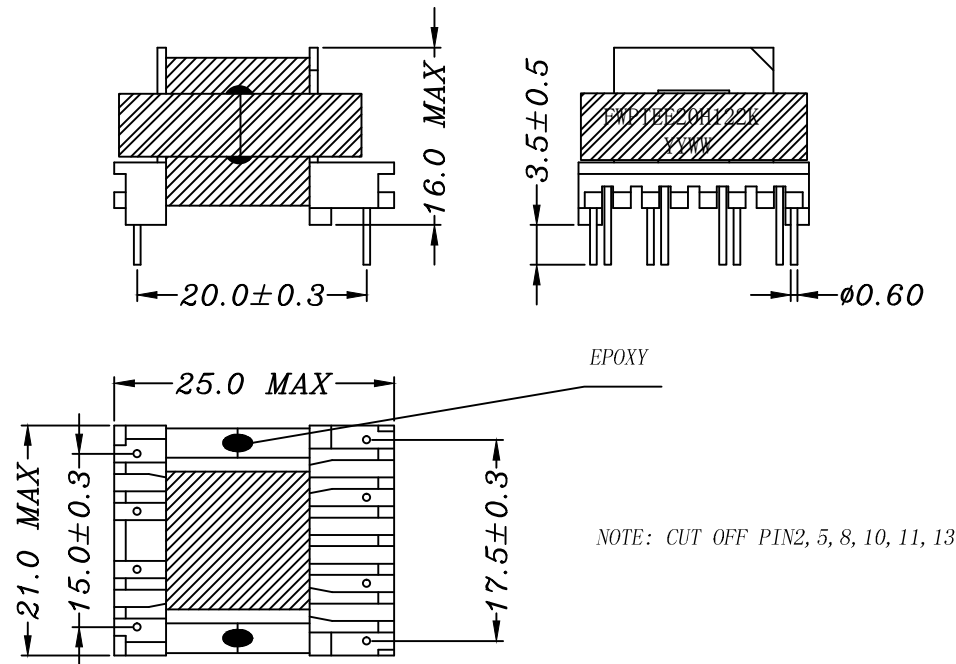

2. Schematic Diagram

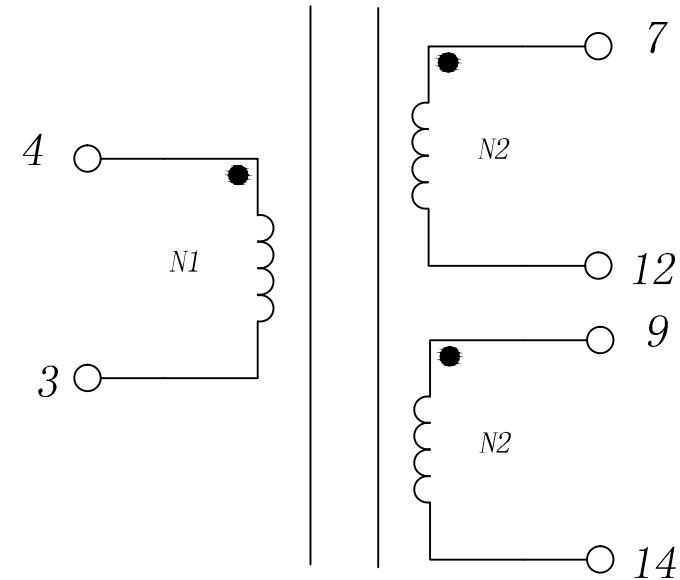

3. Material List

Core:FW40-EE20

Bobbin: FWB2027(6+8PIN)

Wire:2UEW TIW-B

Operating Temperature: -30 to 115°C

4. Electrical Specification

Inductance: $L(4-3) = 1.16\text{mH} \pm 10\%$ 10.0KHZ 0.05V

Hi-pot: P-S=AC 4.0KV 2S 3mA 50Hz

LK: $L(4-3) < 50\mu\text{H}$ short other pins

REV.	DATE	 Convention Placement	DRW.		Drawing Title:	Part No:
0	06/01		CHK.		TRANSFORMER	FWPTEE20H122K
			APP.		Customer P/N:	Specification Sheet 1 of 1

RoHS

www.fosopower.com