



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES



1.Mechanical Dimensions

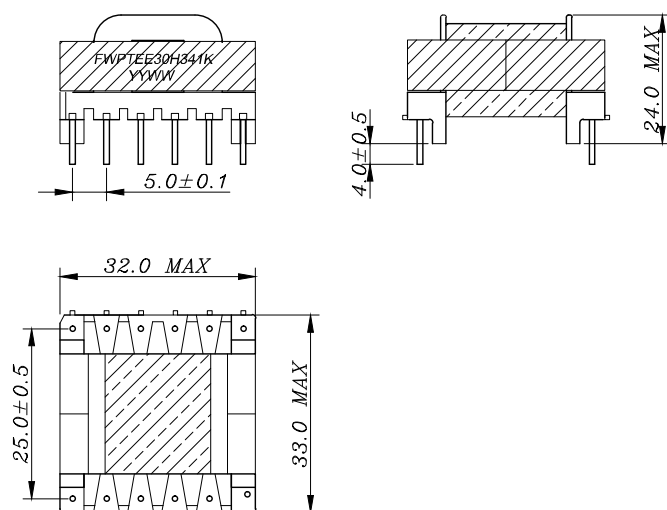

2.Schematic Diagram

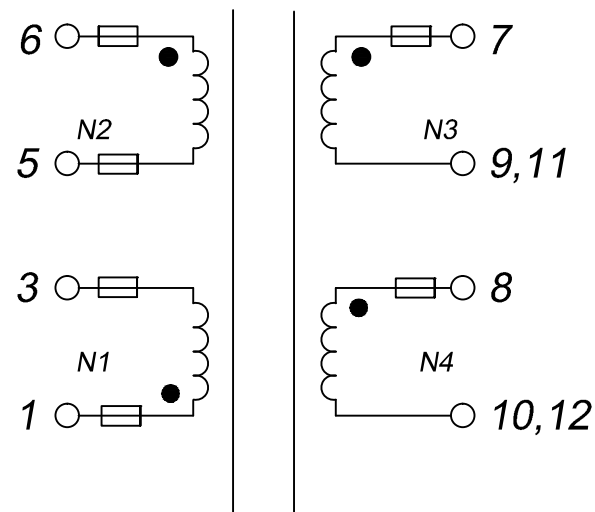

3.Material List

Core:FWEE30/15/7

Bobbin:FWB3015 6+6PIN

Wire:2UEW-0.40mm 155℃

Tube:TFL TUBE

Operating Temperature: -30 to 115℃

4.Electrical Specification

Inductance: $L(1-3) = 342.5\mu H \pm 10\%$ 1.0KHZ 1.0V

HI-POT: P-S AC 3000V 2mA 60seconds

P-CORE AC 3000V 1mA 60seconds

S-CORE AC 1000V 1mA 60seconds

REV.	DATE	 Convention Placement	DRW.	Drawing Title: TRANSFORMER Customer P/N:	Part No: FWPTTEE30H341K
0	00/00		CHK.		
			APP.		Specification Sheet 1 of 1

RoHS

www.fosopower.com

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION