


CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES



1.Mechanical Dimensions

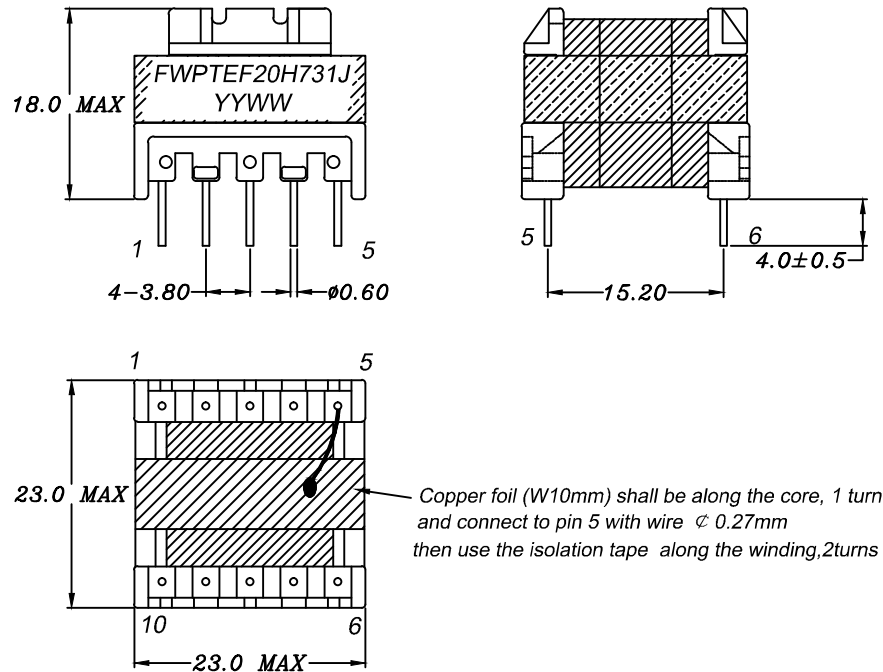

3.Material List

Core:FW40-EE20/10/6


Bobbin:FWB2008(EF20)

Wire:2UEW

Copper foil: 0.025t*10.0mm

Operating Temperature: -30 to 115℃

2.Schematic Diagram

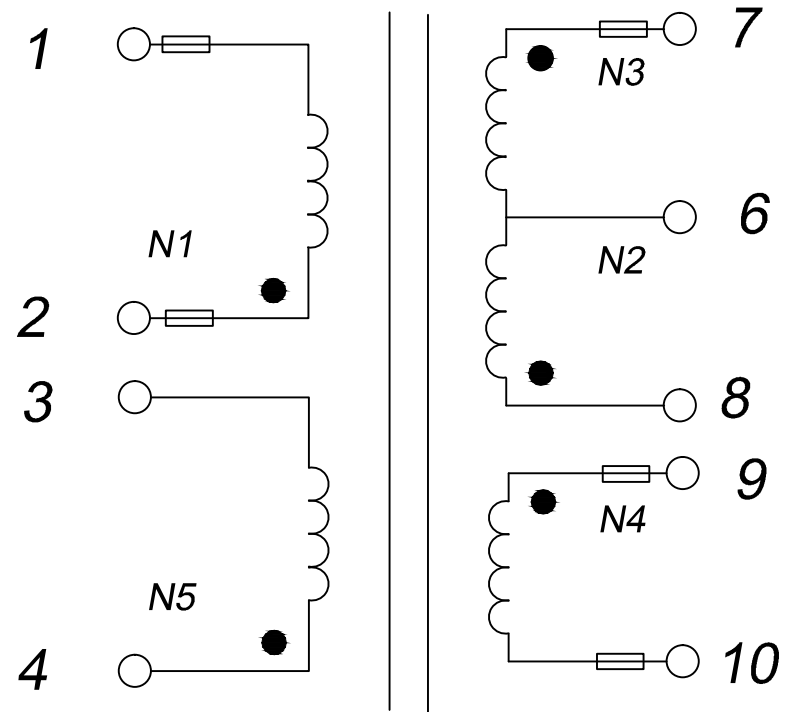

4.Electrical Specification

Inductance: $L(1-2) = 735\mu H \pm 5\%$ 1.0KHZ 1.0V

HI-POT: N1-N5 AC 500V 3mA 3seconds

N1,N5-N2,N3,N4 AC 1500V 3mA 3seconds

COIL-CORE AC 1500V 3mA 3seconds

REV.	DATE	 Convention Placement	DRW.		Drawing Title: TRANSFORMER Customer P/N:	Part No: FWPTEF20H731J
0	10/18		CHK.			
			APP.			Specification Sheet 1 of 1

RoHS

www.fosopower.com